



CONTAC US:

Customer Service: +1 (786) 5847439

Sales Team: +1 (786) 8602528

Email: sales@lfsusa.store

www.lfsusa.store

About us



LFSUSA.STORE is a company specialized in the commercialization of equipment for restaurants, in addition to being representatives of manufacturers to the food industry. Our clients can experience the quality of our personalized service. Contact us and receive the necessary support so that the purchase of your food equipment is a wise investment.

We're more than just an online retailer. Since 2015, we've created an innovative, easy-to-use website to meet the purchasing needs of businesses from all over the globe. LFSUSA.STORE, The Leading Distributor of Restaurant Supplies and Equipment

We have everything your business needs to function at its best. Over the years we have expanded our selection of commercial equipment and wholesale supplies to include healthcare, educational, food, beverage, office, parts, hotel, shipping, and industrial supplies. Our focus is your convenience – order online from your laptop, desktop, or smartphone 24 hours a day, 7 days a week. Our fast shipping, low prices, and outstanding customer service make Latam Food Service the best choice to meet all of your professional and food service supply needs.



Amazing Customer Service

Our personalized customer service helps you buy what you need without mistakes!



No Hiddern Costs!

The prices you see on the site are the ones you pay for the equipment! No extra charges at delivery!




Free Shipping on All Orders

Get free shipping on all orders within the US and they'll arrive in 5-8 calendar days!



High Quality Content

We provide you with the relevant info you need to make the right purchasing decisions. Every one of our product descriptions is written by a dedicated content writer.

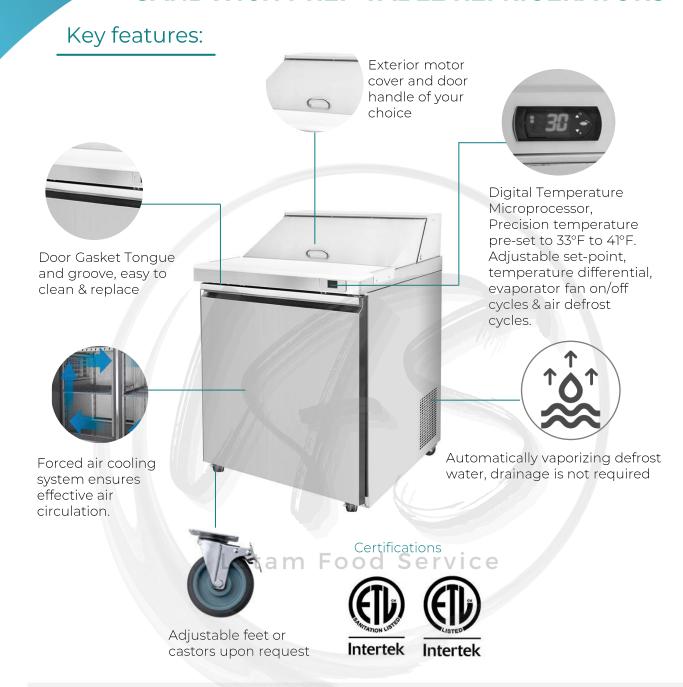

Atlas Air's Sandwich Prep Table Refrigerators an excellent choice for preparing sandwiches, salads and cold food products in your restaurant or commercial kitchen. With a stainless steel exterior, bright white or stainless steel interior, forced air refrigeration system and digital thermostat microprocessor, your food products are sure to maintain consistent temperatures of 33°F to 41°F in the bottom storage area as well as the top pan rail even in the busiest kitchens.





			6
Model Numbers		ASP29	ASP48
	Interior Capacity (cu/ft)	6.7	13.8
	GN Pans	8, Clear Plastic	12, Clear Plastic
	Exterior Size WxDxH (inches)	29 x 30 3/8 x 45 3/8	48 3/8 x 30 3/8 x 45 3/8
	Interior Size WxDxH (inches)	24 3/4 x 25 3/8 x 28 3/4	44 1/4 x 25 3/8 x 28 3/4
	Exterior Construction	High polished	
	Interior Construction		er coated aluminum
			48 3/8 x 9 1/2 x 1, NSF
Dimensions &	Cutting Board WxDxH	29 x 9 1/2 x 1, NSF certified	cortified polyothylano
Construction	(inches)	polyethylene white plastic	white plastic
	Shelves	1 white epoxy coated wire	2 white epoxy coated wire
	Handle	ABS Plastic, recessed	
	Solid Door	1 Stainless Steel Door	2 Stainless Steel Doors
	Door Gasket	Tongue and groove, e	asy to clean & replace
	Hinges	Stainless steel	
	Pilasters and Shelf Clips	Stainless steel	
	Floor	Rounded, coved corners	
	Casters	(2) Locking, (2	2) non-locking
	Temperature Range	33°F to 41°F	33°F to 41°F
	Refrigeration System	Forced Air	Forced Air
	Refrigerant	R290	R291
Refrigeration	Expansion Device	Capillary Tube	
System	Defrost method	Automatic	
System	Compressor Type	Hermetic compressor	
	Condenser Type	Air cooled, electrostatic coated copper tube	
	Evaporator Type	Air cooled, electrostatic coated copper tube	
\\	Humidity control	Hot gas condens	ation evaporation
	Power	115/60/1	115/60/1
	Plug	8 Ft NEMA 5-15P	8 Ft NEMA 5-15P
Electrical System	Horse Power Latam	Food Mervice	1/5
	Kilowatts per 24 Hours		
	Amperage	2.8	3.9
	Shipping Dimensions		
Packaging &	Shipping Weight		<u> </u>
Shipping Info	Palletized	Yes, wood, front/back loading	
5ppge	Material	Wood, card board, sty	yrofoam, plastic wrap
	UPC GTIN		
	Digital Temperature	Precision temperature pre-set to 33°F to 41°F.	
Digital Temperature	Microprocessor	Adjustable set-point, temperature differential,	
		evaporator fan on/off cycles & air defrost cycles.	
Controller	Key Pad	Adjustable, ta	<u> </u>
	Screen	2" blue LCD	2" blue LCD
	Water resistant	Yes	Yes
	Compressor	5 Years	5 Years
Warranty	Parts	2 Years	2 Years
	Labor	2 Year	2 Year
Certifications	ETL sanitation (conforms to NSF 7 Foodservice), ETL electrical (US and Canada)		
Application	For Commercial Kitchens (not for residential use)		





		6	
Model Numbers		ASP60	ASP72
	Interior Capacity (cu/ft)	17.8	22.3
	GN Pans	16, Clear Plastic	18, Clear Plastic
	Exterior Size WxDxH (inches)	61 1/4 x 30 3/8 x 45 3/8	72 x 30 3/8 x 45 3/8
	Interior Size WxDxH (inches)	57 x 25 3/8 x 28 3/4	67 3/4 x 25 3/8 x 28 3/4
	Exterior Construction		l stainless steel
	Interior Construction	Bright white powder coated aluminum	
Dimensions & Construction	Cutting Board WxDxH (inches)	61 1/4 x 9 1/2 x 1, NSF certified polyethylene white plastic	72 x 9 1/2 x 1, NSF certified polyethylene white plastic
	Shelves	2 white epoxy coated wire	3 white epoxy coated wire
	Handle	ABS Plastic, recessed	
	Solid Door	2 Stainless Steel Doors	
	Door Gasket	Tongue and groove, easy to clean & replace	
	Hinges	Stainless steel	
	Pilasters and Shelf Clips	Stainless steel	
	Floor	Rounded, coved corners	
	Casters		2) non-locking
	Temperature Range	33°F to 41°F	33°F to 41°F
	Refrigeration System	Force	ed Air
	Refrigerant	R292	R293
Defricaration	Expansion Device	Capillary Tube	
Refrigeration System	Defrost method	Automatic	
System	Compressor Type	Hermetic compressor	
	Condenser Type	Air cooled, electrostatic coated copper tube	
	Evaporator Type	Air cooled, electrostatic coated copper tube	
	Humidity control	Hot gas condens	ation evaporation
	Power	115/60/1	115/60/1
	Plug	8 Ft NEMA 5-15P	8 Ft NEMA 5-15P
Electrical System	Horse Power Lata M	Food 5/52 rvice	1/5
·	Kilowatts per 24 Hours		
	Amperage	3.9	4.0
De also vin v 0	Shipping Dimensions		
	Shipping Weight		
Packaging & Shipping Info	Palletized	Yes, wood, front/back loading	
	Material	Wood, card board, styrofoam, plastic wrap	
	UPC GTIN		
Digital Temperature	Digital Temperature Microprocessor	Precision temperature pre-set to 33°F to 41°F. Adjustable set-point, temperature differential, evaporator fan on/off cycles & air defrost cycles.	
Controller	Key Pad	Adjustable, tactile key pad	
	Screen	2" blue LCD	2" blue LCD
	Water resistant	Yes	Yes
Warranty	Compressor	5 Years	5 Years
	Parts	2 Years	2 Years
	Labor	2 Year	2 Year
Certifications	ETL sanitation (conforms to NSF 7 Foodservice), ETL electrical (US and Canada)		
Application	For Commercial Kitchens (not for residential use)		
1. 1			





			6
Model Numbers		ASP29-SI	ASP48-SI
	Interior Capacity (cu/ft)	6.7	13.8
	GN Pans	8, Clear Plastic	12, Clear Plastic
	Exterior Size WxDxH (inches)	29 x 30 3/8 x 45 3/8	48 3/8 x 30 3/8 x 45 3/8
	Interior Size WxDxH (inches)	24 3/4 x 25 3/8 x 28 3/4	44 1/4 x 25 3/8 x 28 3/4
	Exterior Construction	High polished stainless steel	
	Interior Construction	Stainless steel	
Dimensions & Construction	Cutting Board WxDxH (inches)	29 x 9 1/2 x 1, NSF certified polyethylene white plastic	wnite plastic
	Shelves	1 white epoxy coated wire 2 white epoxy coated wire	
	Handle	ABS Plastic, recessed	
	Solid Door	1 Stainless Steel Door	2 Stainless Steel Doors
	Door Gasket	Tongue and groove, easy to clean & replace	
	Hinges	Stainless steel	
	Pilasters and Shelf Clips	Stainless steel	
	Floor	Rounded, coved corners	
	Casters	(2) Locking, (2	,
	Temperature Range	33°F to 41°F	33°F to 41°F
	Refrigeration System	Forced Air	Forced Air
	Refrigerant	R290	R291
Refrigeration	Expansion Device	Capillary Tube	
System	Defrost method	Automatic	
	Compressor Type	Hermetic compressor	
	Condenser Type	Air cooled, electrostatic coated copper tube	
	Evaporator Type	Air cooled, electrostatic coated copper tube	
	Humidity control	Hot gas condensa	The state of the s
	Power	115/60/1	115/60/1
Electrical System	Plug Horse Power	8 Ft NEMA 5-15P	8 Ft NEMA 5-15P 1/5
Electrical System	Horse Power Kilowatts per 24 Hours	rood Jervice	1/5
	Amperage	2.8	3.9
	Shipping Dimensions	2.0	5.9
	Shipping Weight		
Packaging &	Palletized	Yes, wood, fron	t/back loading
Shipping Info	Material	Wood, card board, styrofoam, plastic wrap	
	UPC GTIN	vvood, cara board, st	riordarii, plastie wrap
Digital Temperature Controller	Digital Temperature	Precision temperature pre-set to 33°F to 41°F. Adjustable set-point, temperature differential, evaporator fan on/off cycles & air defrost cycles.	
	Key Pad	Adjustable, tactile key pad	
	Screen	2" blue LCD	2" blue LCD
	Water resistant	Yes	Yes
Warranty	Compressor	5 Years	5 Years
	Parts	2 Years	2 Years
	Labor	2 Year	2 Year
Certifications	ETL sanitation (conforms to NSF 7 Foodservice), ETL electrical (US and Canada)		
Application	For Commercial Kitchens (not for residential use)		
	-		





		· ·	<i>u</i> -
Model Numbers		ASP60-SI	ASP72-SI
	Interior Capacity (cu/ft)	17.8	22.3
	GN Pans	16, Clear Plastic	18, Clear Plastic
	Exterior Size WxDxH (inches)	61 1/4 x 30 3/8 x 45 3/8	72 x 30 3/8 x 45 3/8
	Interior Size WxDxH (inches)	57 x 25 3/8 x 28 3/4	67 3/4 x 25 3/8 x 28 3/4
	Exterior Construction		stainless steel
	Interior Construction	Stainless steel	
	Cutting Board WyDyll	61 1/4 x 9 1/2 x 1, NSF	72 x 9 1/2 x 1, NSF certified
Dimensions &	Cutting Board WxDxH (inches)	certified polyethylene	polyethylene white plastic
Construction		white plastic	
	Shelves		3 white epoxy coated wire
	Handle	ABS Plastic, recessed	
	Solid Door	2 Stainless Steel Doors	
	Door Gasket	Tongue and groove, easy to clean & replace	
	Hinges	Stainless steel	
	Pilasters and Shelf Clips	Stainless steel	
	Floor	Rounded, coved corners	
	Casters		2) non-locking
	Temperature Range	33°F to 41°F	33°F to 41°F
	Refrigeration System		ed Air
	Refrigerant	R292	R293
Refrigeration	Expansion Device	Capillary Tube	
System	Defrost method	Automatic	
	Compressor Type	Hermetic compressor	
	Condenser Type	Air cooled, electrostatic coated copper tube	
	Evaporator Type	Air cooled, electrostatic coated copper tube Hot gas condensation evaporation	
	Humidity control	115/60/1	115/60/1
	Power Plug	8 Ft NEMA 5-15P	8 Ft NEMA 5-15P
Electrical System	Horse Power	6 FLINEMA 5-15P	1/5
Electrical System	Kilowatts per 24 Hours	1/3E V C E	1/5
	Amperage	3.9	4.0
	Shipping Dimensions	5.9	4.0
	Shipping Weight		
Packaging &	Palletized	Ves wood from	nt/back loading
Shipping Info	Material	Yes, wood, front/back loading Wood, card board, styrofoam, plastic wrap	
	UPC GTIN	vvood, cara board, se	yroroarri, piastie wrap
		Precision temperature	pre-set to 33°F to 41°F.
Digital Temperature Controller	Digital Temperature	Adjustable set-point, temperature differential,	
	Microprocessor	evaporator fan on/off cycles & air defrost cycles.	
	Key Pad	Adjustable, tactile key pad	
	Screen	2" blue LCD	2" blue LCD
	Water resistant	Yes	Yes
Warranty	Compressor	5 Years	5 Years
	Parts	2 Years	2 Years
	Labor	2 Year	2 Year
Certifications	ETL sanitation (conforms to NSF 7 Foodservice), ETL electrical (US and Canada)		
Application	For Commercial Kitchens (not for residential use)		
	. S. SS. Maria Mar		



CONTAC US:

Customer Service

+1(786) 5847439

Sales team: +1(786) 8602528

WEB SITE: www.lfsusa.store

Email: sales@lfsusa.store